
LUMINAIRE

SEQUOIA LIGHTING SYSTEMS

SCONCE

DESIGN LS500

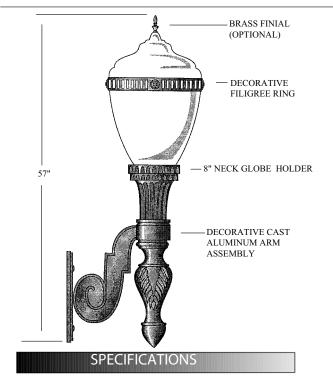

Luminaire Name: Los Angeles Sconce Description: Sconce luminaire with decorative arm and integral ballast assembly and decorative globe.

Material: Aluminum AA319.OF Lens/Panels: Acrylic / Polycarbonate UV stabilized / Glass Wattage/Lamping:


- Mercury Vapor (100, 175 or 250 watt)
- High Pressure Sodium (70, 100, 150, 200 or 250 watt)
- Metal Halide (100, 175, 250 watt)
- QL Induction (55, 85 watt)
- Incandescent

Distribution: Symmetric Asymmetric or Voltage: 120, 208, 240, 277 or 480 volt Options: Decorative Band-Cage / House side shield /


Photo control / Finial / Activated Charcoal Filter / Fusing


Dimensions: All dimensions nominal are Photometry: Available upon request on I.E.S. formatted disk Warranty: Fixture shall be warranted to be free of defects for two

years. Ballast components shall carry the ballast manufacturer's limited warranty









OPTIONAL GLOBE HOLDERS

FINISH

Three Stage:

- · Cleaned and Etched
- Primered
- · Powder coated or wet painted

Colors: Black, bronze, green, gray, swedish iron

* Custom colors available

APPLICATIONS

- · Roadways
- · Parking Lots
- Perimeter Ltg.
- Transportation Terminals
- Office Complexes
- · School Campus
- · Shopping Malls
- Hotels/Motels
- Industrial Sites
- · Commercial Developments
- Waterfront Areas
- Parks/Recreational Areas
- Architectural Landscape Ltg.

SEQUOIA LIGHTING CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

13644 George Blvd, Suite 1, Victorville, CA, 92394 (760) 246-5213 FAX (760) 246-5294 www.sequoialighting.com

LUMINAIRE

SEQUOIA LIGHTING SYSTEMS

SCONCE

ORDERING NUMBER LOGIC

(A) DESIGN I.D. Top Right Corner of Cutsheet	© LAMP WATT AGE	1 PAINT
o	1 = 35 Watts	BL = Black
B BALLAST TYPE	2 = 50 Watts	BR = Bronze
High Pressure Sodium	3 = 55 Watts	VR = Verde
20 = 120V High Power Factor (150W and below)	4 = 70 Watts	GG = Green
21 = 120V Regulated High Power Factor	5 = 85 Watts	GY = Gray
22 = 120V Normal Power Factor	6 = 100 Watts	WH = White
23 = 240V High Power Factor	7 = 150 Watts	$\mathbf{RD} = \mathbf{Red}$
24 = 240V Regulated Power Factor	8 = 165 Watts	BU = Blue
25 = 240V Lag Norma Power Factor	9 = 175 Watts	CC = Custom (Per specification)
26 = 208V Regulated Power Factor	10 = 200 Watts	
27 = 277V Regulated Power Factor	11 = 250 Watts	(J) LIGHTNING ARREST OR OPTION
28 = 480 V Regulated Power Factor	12 = 310 Watts	0 = None
M1 = Multi-volt Regulated High Power Factor	13 = 400 Watts	A = (1) 120V Arrestors
Wired 120V	00 = 1000 Watts	B = (1) 240V Arrestors
H6 = 6.6 AMP	15 = 1500 Watts	C = (2) 120V Arrestors
		D = (2) 240V Arrestors
Metal Halide	(D) PHOT OCONTROL	- (-)
30 = 120V CWA High Power Factor	$\overline{0}$ = Without Photo Control	(K) LAMP OPTION
31 = 240V CWA High Power Factor	1 = With Photo Control	$\frac{1}{0} = \text{No Lamp Included}$
32 = 208V High Power Factor	White Photo Condition	C = Clear Lamp Included
33 = 277V CWA High Power Factor	(Ê) INTERNAL GLASS REFRACT OR	R = Rapid Start Lamp Included
34 = Multi-volt CWA High Power Factor	$\frac{1}{0} = \text{None}$	F = Coated Lamp Included
Wired For 120V	1 = Yes	M = Master Color Lamp Included
$\mathbf{M6} = 6.6 \text{ AMP}$	1 –165	P = Protected Metal Halide
MO = 0.0 AMP	(F) INTERNAL GLOBE REFLECT OR	
Marcum Vanar	(1)	- · · · · · · · · · · · · · · · · · · ·
Mercury Vapor		W = White Son HPS Lamp Included
02 = 120/240 Regulated High Power Factor	1 = Yes	Q = QL Induction Lamp Included
Wire For 120V		FUSE OPTION
03 = 240/480 Regulated High Power Factor	(G) IES LIGHT DISTRIBUTION	
Wire For 240V	2 = Type II	0 = No Fusing
04 = 208V Regulated High Power Factor	3 = Type III	1 = (1) 5 Amp Fuse
05 = 277V Regulated High Power Factor	5 = Type V	2 = (2) 5 Amp Fuse
06 = 120V Lag Auto Normal Power Factor		3 = (1) 10 Amp Fuse
07 = Multi-volt Regulated High Power Factor	(H) GLOBE/LENS	4 = (2) 10 Amp Fuse
Wired For 120V	$\mathbf{GC} = \mathbf{Glass} \mathbf{Clear}$	5 = (1) 15 Amp Fuse
V6 = 6.6 AMP	GW = Glass White	6 = (2) 15 Amp Fuse
	PC = Polycarbonate Clear (Transle	ucent) $7 = (1) 20$ Amp Fuse
QL Induction (Please Specify Kelvin Rating)	PW = Polycarbonate White	8 = (2) 20 Amp Fuse
Q1 = 120V	AC = Acrylic Clear	
Q2 = 240V	AW = Acrylic White	
Q6 = 6.6 AMP	SM = Smoked	
Incandescent		
IN - Specify Wattage		

IN = Specify Wattage

OPTIONS

*When ordering optional decorative globe ring/cage, finial or heat shield, please consult factory.

SEQUOIA LIGHTING

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

13644 George Blvd, Suite 1, Victorville, CA, 92394 (760) 246-5213 FAX (760) 246-5294 www.sequoialighting.com

Revision