


NOSTALGIA

DESIGN PBN901

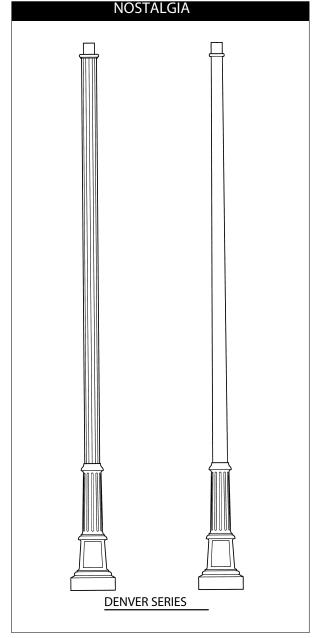

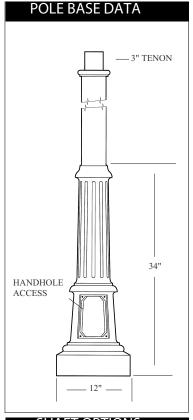



<u>SPECI</u>FICATIONS

Lighting standards shall be all aluminum, one piece construction. All aluminum alloys comply with metallurgical and mechanical properties set forth in the Aluminum Association Standards. Each pole is tapered and fluted or smooth upper base design resting on the lower base section.

SHAFT

The shaft is extruded from ASTM 6061 aluminum alloy tubing or tapered ASTM 6063. Each pole has a fluted or smooth, tapered or straight upper section on a cast aluminum decorative base. Located in the decorative base of the standard is a large handhole door opening with cover for easy wiring access and fusing.

ANCHOR BOLTS

Furnished with each standard are four hot dip galvanized anchor bolts, each with double nuts and double flat washers. Each anchor bolt assembly is provided with a 4" tail. Anchor bolt settings are provided to the customer with each shipment.

FINISH

Each lighting standard is cleaned, etched and primered prior to the painting process. Standard colors are black, green, bronze or verde patina. All paint is applied by either powder coat or wet spray process. Custom colors and finishes are also available.

ORDERING NUMBER LOGIC

| PRODUCT I.D. | SHAFT TYPE | OVERALL HT. | MATERIAL TYPE | COLOR | OPTIONS |
|--------------|--|--|--|---|--|
| 3L-PDIN9UT | 3 = 3" Dia. Smooth 4 = 4" Dia. Smooth 5 = 4" Dia Fluted 6 = 3"- 4" Tapered Fluted 7 = 3" - 4" Tapered Smooth | 08 = 8' 10 = 10' 12 = 12' 14 = 14' 16 = 16' 00 = Custom HT. | AA = Aluminum CS = Cast Iron CC = Custom | BL = Black BR = Bronze VP = Verde Patina GY = Gray UP = Unpainted CC = Custom | OR = Receptacle OB = Banner Arms OC = Custom Logo OS = Signage AB = Anchor Bolts OO = None |

SEQUOIA LIGHTING

CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS