


LUMINAIRE



SEQUOIA LIGHTING SYSTEMS

AREA

DESIGN
LA606

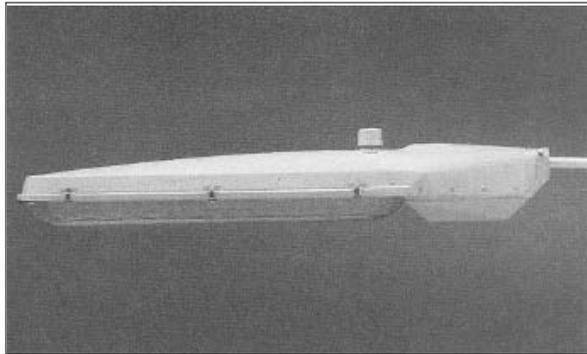

SERIES SL-SRP LOW PRESSURE SODIUM
(AVAILABLE IN SERIES 6.6 AMP)

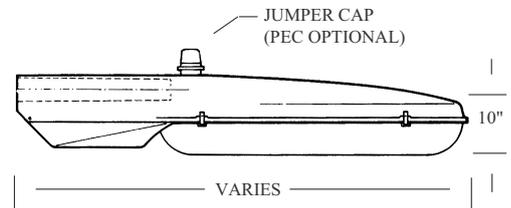

ACCEPTS 1 1/2" TO 2" O.D. MOUNTING. END OF ARM
MUST HAVE 6^{3/4}" STRAIGHT SECTION.

SPECIFICATIONS

Luminaire Name: Low Pressure Sodium Luminaire
Description: Low Pressure Sodium roadway luminaire, housing constructed of non-corrosive ABS plastic with UV inhibiting Korade film. Designed for energy saving constant lumen output low pressure sodium lamp.

Material: ABS plastic with UV inhibiting Korade film

Refractor: Injection molded polycarbonate prismatic

Wattage/Lamping:

- Low Pressure Sodium (90 thru 180 watt)

Distribution: Symmetric or Asymmetric

Voltage: 120, 208, 240, 277, 480 volt or 6.6 amp

Options: Photo Control / Fusing

Photometry: Available upon request on I.E.S. formatted disk

Warranty: Fixture shall be warranted to be free of defects for two years. Ballast components shall carry the ballast manufacturer's limited warranty

FINISH

Housing: Outside housing constructed of non-corrosive ABS plastic with UV inhibiting Korade film.

Color: Gray

APPLICATIONS

- Roadways
- Parking Lots
- Transportation Terminals
- Industrial Sites
- Commercial Developments
- Highways

SEQUOIA LIGHTING
CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

13644 George Blvd, Suite 1, Victorville, CA, 92394 (760) 246-5213 FAX (760) 246-5294 www.sequoialighting.com

LUMINAIRE

SEQUOIA LIGHTING SYSTEMS

AREA

ORDERING NUMBER LOGIC

Example: LA600 -H6 -3 -0 -3 -0 -PC -GY -O -O -O -O

(A) (B) (C) (D) (E) (F) (G) (H) (I) (J) (K) (L)

(A) DESIGN I.D. Top Right Corner of Cutsheet

(B) BALLAST TYPE
 Low Pressure Sodium
 20 = 120V High Power Factor (150W and below)
 21 = 120V Regulated High Power Factor
 22 = 120V Normal Power Factor
 23 = 240V High Power Factor
 24 = 240V Regulated Power Factor
 25 = 240V Lag Norma Power Factor
 26 = 208V Regulated Power Factor
 27 = 277V Regulated Power Factor
 28 = 480V Regulated Power Factor
M1 = Multi-volt Regulated High Power Factor
 Wired 120V
H6 = 6.6 AMP

(C) LAMP WATT AGE
 1 = 35 Watts
 2 = 55 Watts
 3 = 90 Watts
 4 = 135 Watts
 5 = 180 Watts

(D) PHOT OCONTROL
 0 = Without Photo Control
 1 = With Photo Control

(E) IES LIGHT DISTRIBUTION
 2 = Type II
 3 = Type III
 5 = Type V

(F) REFRACT OR TYPE (Cobraheads)
 O = None
 S = Semi Cutoff
 M = Medium Cutoff
 N = Non Cutoff

(G) REFRACT OR MA TERIAL
GC = Glass Clear
GW = Glass White
PC = Polycarbonate Clear
AC = Acrylic Clear

(H) PAINT
OO = None
BL = Black
BR = Bronze
VR = Verde
GR = Green
GY = Gray
WT = White
RD = Red
BU = Blue
CC = Custom (Per Specification)

(I) LIGHTNING ARREST OR OPTION
 0 = None
 A = (1) 120V Arrestors
 B = (1) 240V Arrestors
 C = (2) 120V Arrestors
 D = (2) 240V Arrestors

(J) LAMP OPTION
 0 = No Lamp Included
 C = Clear Lamp Included
 R = Rapid Start Lamp Included
 F = Coated Lamp Included
 M = Master Color Lamp Included
 P = Protected Metal Halide
 Lamp Included
 W = White Son Hps Lamp Included
 Q = QL Induction Lamp Included

(K) FUSE OPTION
 0 = No Fusing
 1 = (1) 5 Amp Fuse
 2 = (2) 5 Amp Fuse
 3 = (1) 10 Amp Fuse
 4 = (2) 10 Amp Fuse
 5 = (1) 15 Amp Fuse
 6 = (2) 15 Amp Fuse
 7 = (1) 20 Amp Fuse
 8 = (2) 20 Amp Fuse

(L) REFRACT OR OPTIONS
 0 = None
 G = Glare Shield
 W = Wire Guard

OPTIONS
 When ordering optional mounting hardware please consult factory for correct catalog number

SEQUOIA LIGHTING

CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

13644 George Blvd, Suite 1, Victorville, CA, 92394 (760) 246-5213 FAX (760) 246-5294 www.sequoialighting.com