




FMA-1

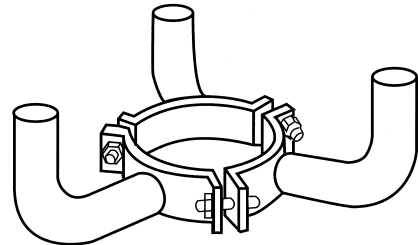

FMA-3

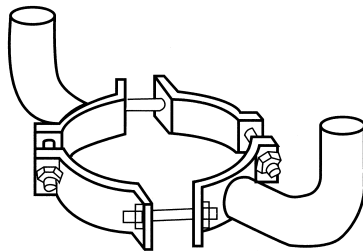

FMA-2

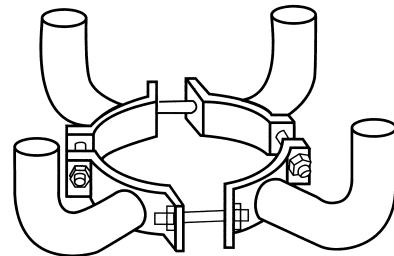

FMA-4

## POST TOP FLOODLIGHT TYPE MOUNTING ARMS

## SPECIFICATIONS

All Sequoia Lighting post top mount arm assemblies slip fit 2" pole tops. Tenons are 2 inch pipe size . Each bracket has a maximum capacity of two, three, or four 1000 watt floodlights, depending on type and mounting configuration. Fitters for 3 inch and 4 inch tenons are available. Brackets cataloged are fabricated from steel and are designed for use on steel and aluminum poles.

## FINISH

All cross arms are cleaned, etched and primed prior to painting. Standard colors for cross arms are black, bronze, green and verde patina powder coated or wet sprayed. Custom colors and special finishes along with hot dip galvanizing are also available.

\*If required cross arm is not shown please consult factory.

**SEQUOIA LIGHTING**  
CORPORATION

MANUFACTURERS OF QUALITY LIGHTING PRODUCTS

13644 George Blvd, Suite 1, Victorville, CA, 92394 (760) 246-5213 FAX (760) 246-5294 [www.sequoialighting.com](http://www.sequoialighting.com)